

Homogenizer HLI90




- Max. 21.500 Liter per hour
- Homogenizing pressure up to 700 bar
- Absorbed motor power: max. 90 kW
- Optional in aseptic execution
- Poppet valves for low viscous and slight abrasive products
- Ball valve for high viscous and abrasive products
- Integrated lubrication system
- Excellent ecological footprint

*Weight incl. motor: max. 2.700 kg
Technical changes reserved*

Poppet valves

Poppet valves for low viscous and slight abrasive products

Model	Max. Pressure	Max. Capacity
HLI90	(bar / psi)	(l/h / gpm)
-100T	100 / 1,450	21,500 / 95
-150T	150 / 2,175	17,500 / 77
-200T	200 / 2,900	13,000 / 57
-250T	250 / 3,600	9,600 / 42
-300T	300 / 4,350	8,000 / 35
-350T	350 / 5,075	6,600 / 29
-550T	550 / 7,975	4,200 / 18

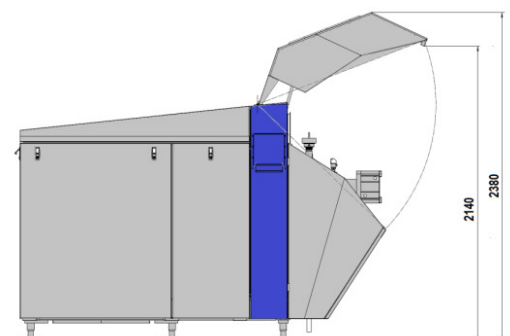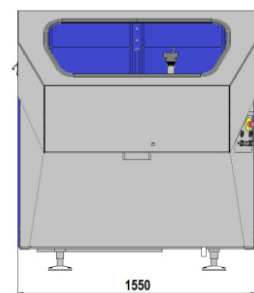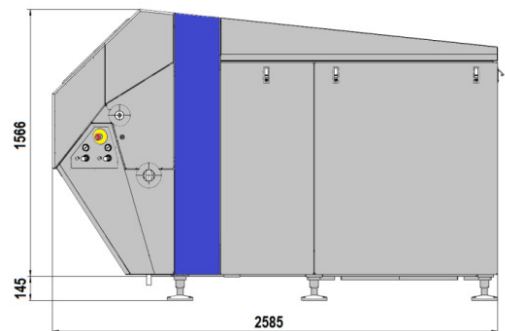

Ball valves

For abrasive and high viscous products

Model	Max. Pressure	Max. Capacity
HLI90	(bar / psi)	(l/h / gpm)
-150K	150 / 2,175	15,300 / 67
-200K	200 / 2,900	11,700 / 52
-250K	250 / 3,600	8,600 / 38
-350K	350 / 4,350	6,000 / 26
-550K	550 / 5,075	3,800 / 17
-700K	700 / 10,000	2,900 / 13